


S2850

The

Very **I**mpressive **B**elts

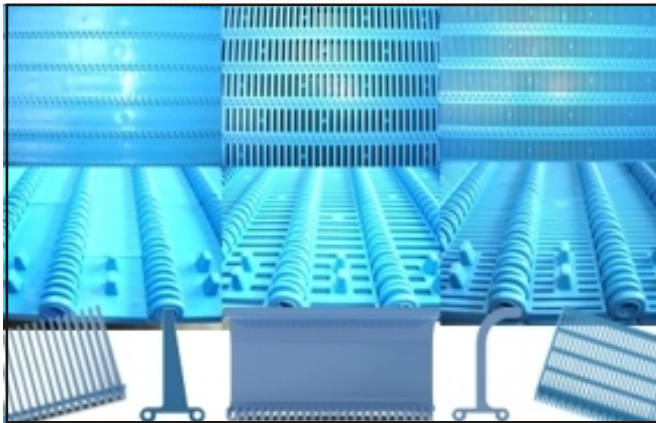

The new series of conveyor belts and escalators which offers "the cleanest solutions" in product conveyance


ALPHAbelt

QUALITY AND SAVING




YANNAKOUDAKIS s.a., Plastic Industry, Thessaloniki
Tel. 23940 71300, fax. 23940 72586 e-mail: info@alphabros.gr, internet: www.alphabros.gr


The specialists on inner-transportation

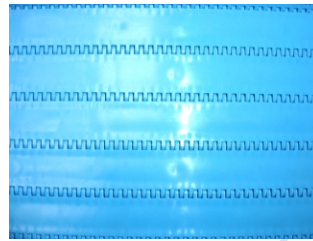


Type: Flat Top
Code: 402850-000
Open surface: 0%
Construction materials: PP & PE
Function temperature: From -60 to +105 °C (according to the material)
Colour: White, Blue, Natural
Upper surface: The surface in touch with the product is flat and smooth, in order to be cleaned easy and fast.

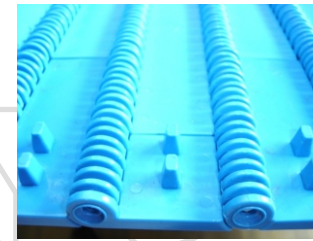


Bottom surface: The surface which co-operates with the sprockets is equally flat and smooth, so as to, on the one hand prevent the remnants retention and, on the other hand to be effectively cleaned.

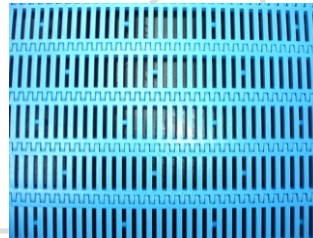


Type: Grid
Code: 402850-200
Open surface: 27% which is created by the openings measuring 4,3 X 29,5 mm.
Construction materials: PP, PE, AC, PPGF.
Function temperature: From -60 to +130 °C (according to the material)
Colour: White, Blue, Natural, Red, Green.
Upper surface: The surface in touch with the product is flat and smooth, in order to be cleaned easy and fast.

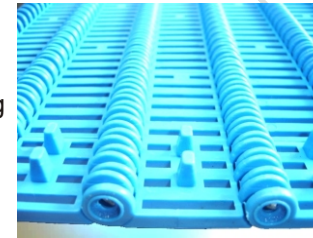




Bottom surface: The surface which co-operates with the sprockets is equally flat and smooth, so as to, on the one hand prevent the remnants retention and, on the other hand to be effectively cleaned.

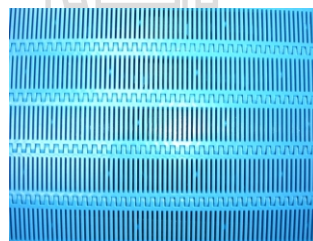

Type: Semi-Grid
Code: 402850-400
Open surface: 24% which is created by the openings measuring 1,9 X 29,5 mm.
Construction materials: PP, PE, AC, PPGF.
Function temperature: From -60 to +130 °C (according to the material)
Colour: White, Blue, Natural, Red, Green.
Upper surface: The surface in touch with the product is flat and smooth, in order to be cleaned easy and fast.

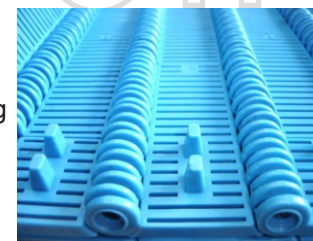

Bottom surface: The surface which co-operates with the sprockets is equally flat and smooth, so as to, on the one hand prevent the remnants retention and, on the other hand to be effectively cleaned.



The pitch of the belts series 2850 is 50 mm.
The thickness of all three types is: a. In the joints 15,8 mm. and b. In the mid space of the joints 6 mm.

